7. Level 2 Repair

1 Disassemble REAR Dummy and Disassemble LCD Conn. 	2 Disassemble REAR 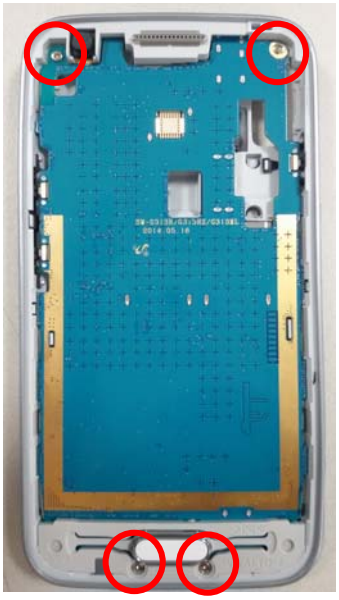
1. Remove the REAR COVER first, and disconnect the LCD connector. 2. The dryer & glass absorber Used to disassemble the LCD ASS'Y and REAR assy.	1. Disassemble 4 point screws.
3 Disassemble Home Key Dummy 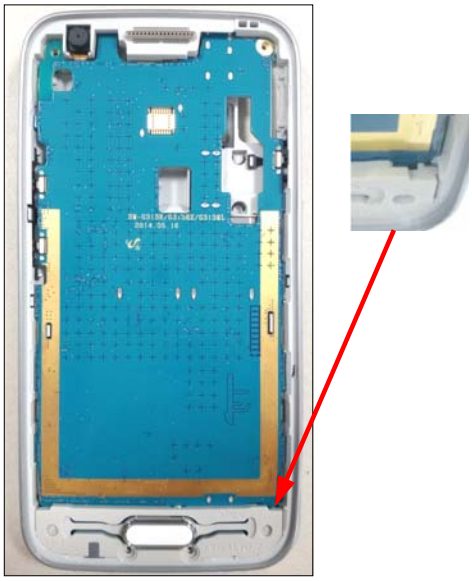	4 Disassemble PBA Ass'y 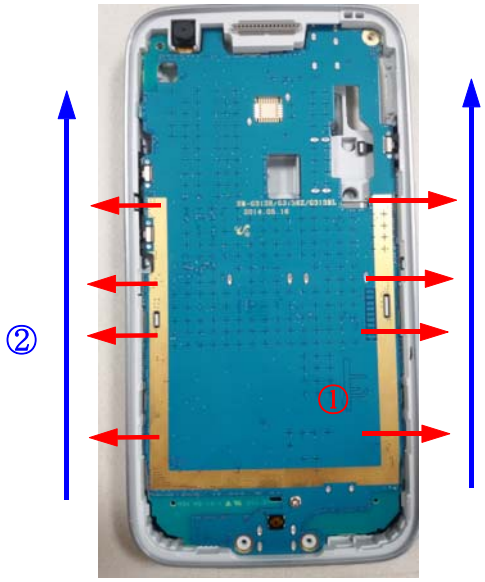
1. Home Key DUMMY right home using tweezers to lift the back round Remove the HOME KEY Dummy.	1. REAR pulling outward from the hook to the bottom 2. Disassemble side hook first, and after that, disassemble from downside to upside

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5 Disassemble SHIELD CAN Screw 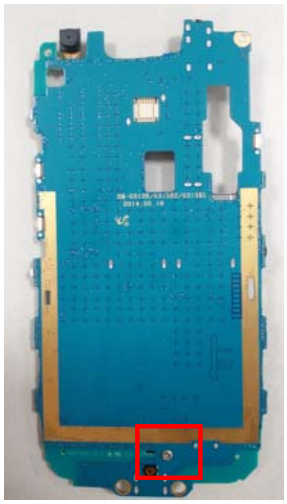	
1. Disassemble 1 point screw.	

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

1 Assemble LCD & TSP 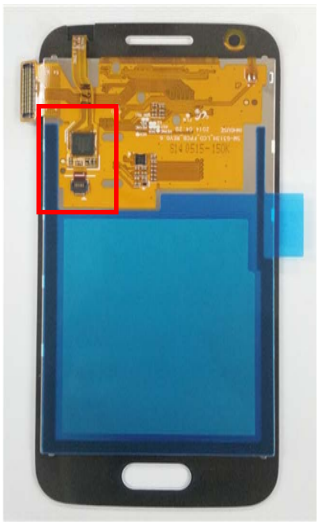	2 Assemble SHIELD CAN
1. Attach LCD and TSP and Connet TSP FPCB Conn.	1. SHIELD CAN assemble the PBA.
3 Screw 1 points 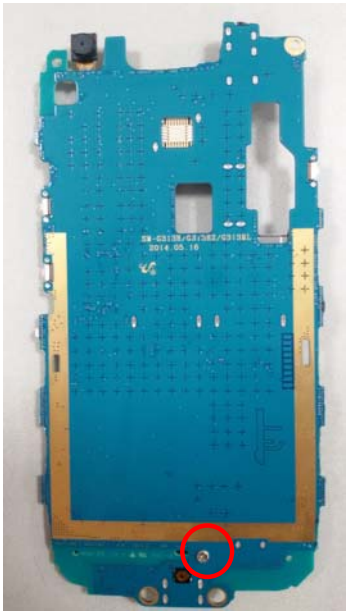	4 Assemble REAR Ass'y 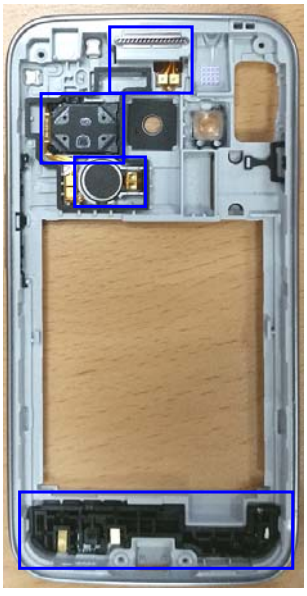
1. Drive the SHIELD CAN SCREW 1Point (Screw torque : 1.1 +-0.1, Machine screw)	1. Assemble the RCV, SPK, MOT, INTENNA to the REAR.

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

5 Assemble PBA ASS'Y and REAR ASS'Y	6 Assemble PBA ASS'Y and REAR ASS'Y
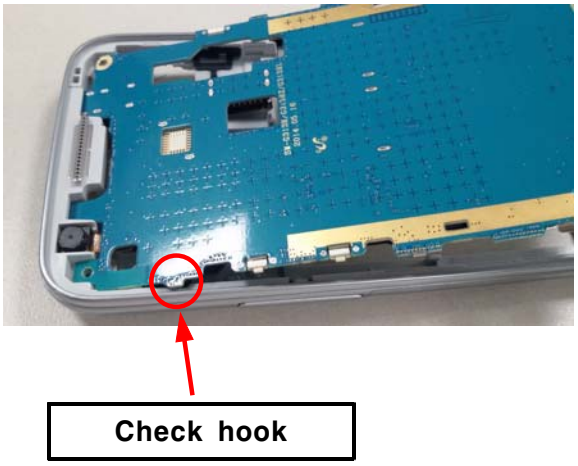	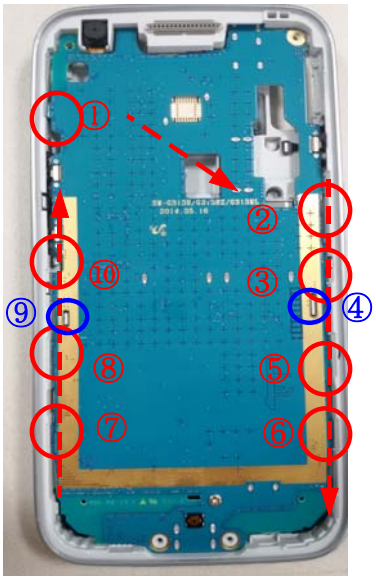
1. Insert the earjack side(upside) first to the REAR.	1. REAR hook correctly 10point Combined.
7 Assemble Home Key Dummy	**8 Screw 4 points**
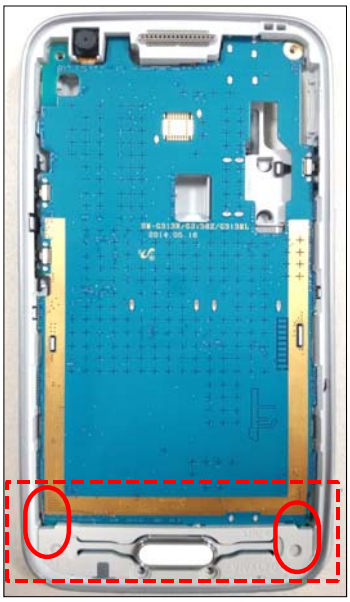	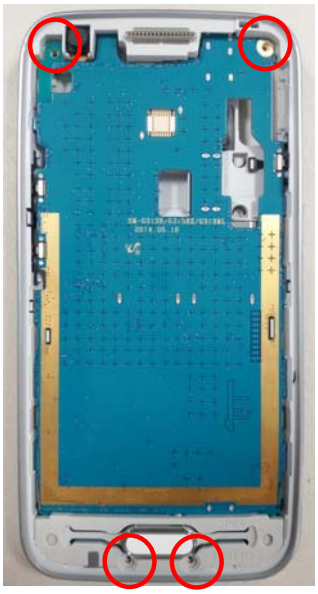
1. HOME KEY DUMMY binds to the REAR ASS'Y. Make sure that both hooks are well combined	1. Drive the 4Point screws (Screw torque : 1.1)

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.

9 Assemble LCD ASS'Y	10 Connected LCD Conn. and Assemble Rear Dummy
	  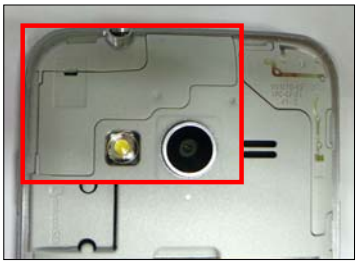
1. REAR LCD connector, insert the Attach the rear LCD ASS'Y to REAR.	1.Tighten the LCD connector combines REAR Dummy.

Confidential and proprietary-the contents in this service guide subject to change without prior notice.
Distribution, transmission, or infringement of any content or data from this document without Samsung's written authorization is strictly prohibited.